

BZL Pro-Grip Max® Features and Benefits

Pro-Grip Max® Handle System Ergonomically Superior

- Integrated soft grips ensure the handle remains in place with minimal grip pressure
- Enhances wire feeding performance
- Screwless design for rapid servicing

Cable Supports Improved Wire Feed

- The perfect balance of freedom of movement and progressive support to the power cable is achieved

Swan Necks

- High temperature resistant insulation materials reducing the risk of shorting
- Durable and robust

Contact Tips

- Manufactured using a harder and higher conductivity copper alloy than the OEM

Hanger Hooks Easy to store

- Less prone to damage
- Encourages an efficient and tidy workspace

Knuckle Joint Improved Manoeuvrability

- Small movements of the handle and neck are possible independently of the cable assembly

Nozzles

Maximises Performance

- Maximum wall thickness gives longevity and superior performance
- Manufactured to the same specifications as the OEM

Hydroflex™ Cable Systems

- Liquid cooled cable systems use high temperature resistant rubber cables which ensure leak free terminations

Hyperflex™ Cable Systems

- Air cooled cable assemblies offer outstanding flexibility and the highest heat and abrasion resistance of any known cable
- Cable end crimp systems ensure maximum conductivity whilst the outer jacket is constructed from cross linked polymers providing a tear proof jacket and a burn threshold of 375°C

Machine End Systems

- Extra length cable support systems
- Smooth and consistent wire feed
- Simple snap fits


Gun Plug Bodies

- Spring loaded pins
- Guaranteed gas seals

Quality Standards

All torches are rigorously tested using computerised and automated test equipment at the design stage through to production. All our components pass rigorous quality control checks prior to assembly. All torches are designed to be tough and damage resistant and comply with EN60974-7.


BZL Eco-Grip Max® Features and Benefits

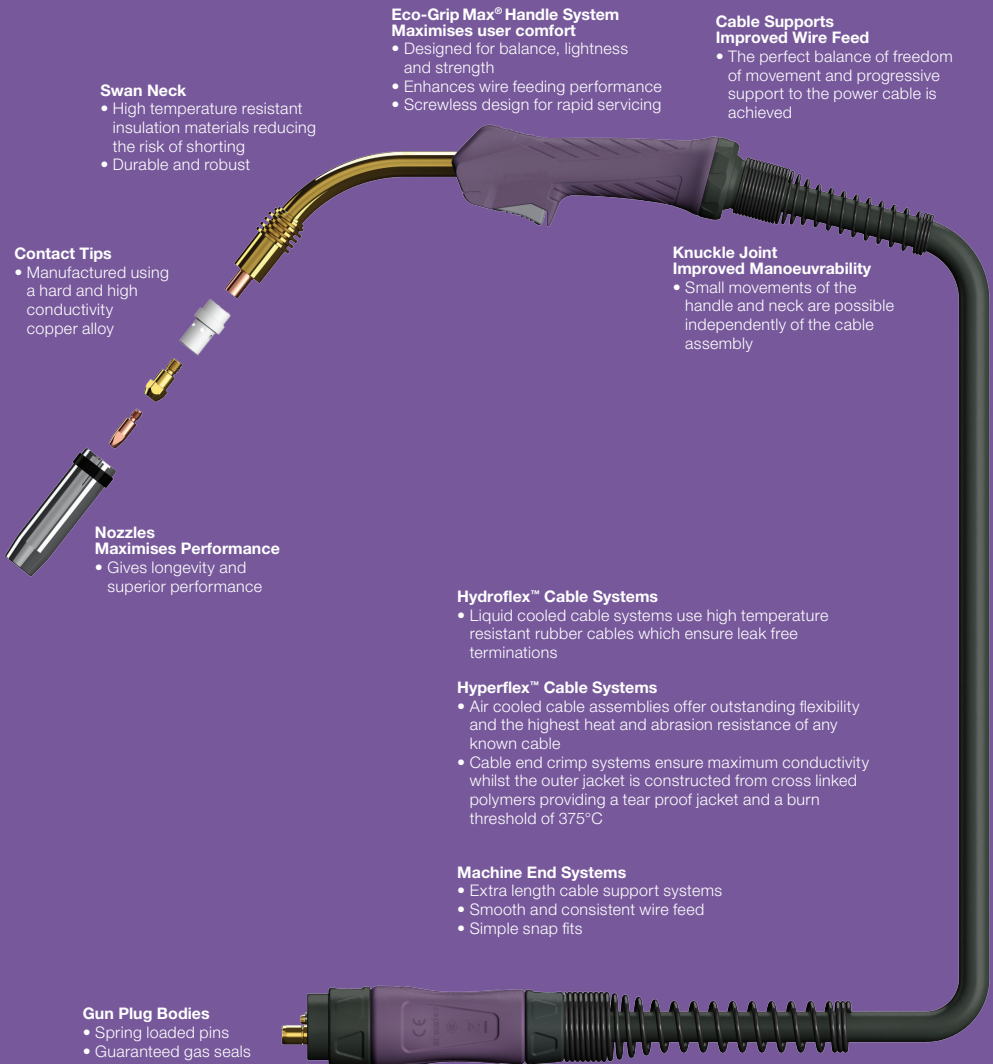


Quality Standards

All torches are rigorously tested using computerised and automated test equipment at the design stage through to production. All our components pass rigorous quality control checks prior to assembly. All torches are designed to be tough and damage resistant and comply with EN60974-7.


BZL Nozzles




Stock Code	Description	Bore Size	Model
A B1529	Cylindrical	16mm/5/8"	SB140A, SB150A
B1530	Conical	12mm/15/32"	SB140A, SB150A
ECO1530	Everyday Conical	12mm/15/32"	ECO150A
B1531	Tapered	11mm/7/16"	SB140A, SB150A




Stock Code	Description	Bore Size	Model
B B1532	Bottle	13mm/1/2"	SB140A, SB150A




Stock Code	Description	Bore Size	Model
C B1533	Spot	16mm/5/8"	SB140A, SB150A




Stock Code	Description	Bore Size	Model
D B2415	Cylindrical	17mm/11/16"	SB230A, SB240A, SB240W
B2416	Conical	13mm/1/2"	SB230A, SB240A, SB240W
B2417	Tapered	10mm/3/8"	SB230A, SB240A, SB240W



Stock Code	Description	Bore Size	Model
E B2507	Cylindrical	18mm/5/7"	SB250A, SB350W
B2508	Conical	15mm/19/32"	SB250A, SB350W
B2509	Tapered	12mm/15/32"	SB250A, SB350W
ECO2507	Everyday Cylindrical	18mm/5/7"	ECO250A
ECO2508	Everyday Conical	15mm/19/32"	ECO250A
ECO2509	Everyday Tapered	12mm/15/32"	ECO250A




Stock Code	Description	Bore Size	Model
F B2510	Bottle	15mm/19/32"	SB250A, SB350W




Stock Code	Description	Bore Size	Model
G B2511	Spot	18mm/5/7"	SB250A, SB350W

Roll Marking


All Parweld consumables are roll marked to enable you to identify genuine Parweld product.




Stock Code	Description	Bore Size	Model
H B3615	Cylindrical	19mm/3/4"	SB360A
B3616	Conical	16mm/5/8"	SB360A
B3617	Tapered	12mm/15/32"	SB360A
ECO3615	Everyday Cylindrical	19mm/3/4"	ECO360A
ECO3616	Everyday Conical	16mm/5/8"	ECO360A
ECO3617	Everyday Tapered	12mm/15/32"	ECO360A




Stock Code	Description	Bore Size	Model
I B4017	Conical	18mm/5/7"	SB400A



Stock Code	Description	Bore Size	Model
J B5027	Cylindrical	19mm/3/4"	SB380A-501W
B5028	Conical	16mm/5/8"	SB380A-501W
B5029	Tapered	14mm/9/16"	SB380A-501W
ECO5027	Everyday Cylindrical	19mm/3/4"	ECO501W
ECO5028	Everyday Conical	16mm/5/8"	ECO501W
ECO5029	Everyday Tapered	14mm/9/16"	ECO501W



Stock Code	Description	Bore Size	Model
K B5028HD	HD Conical	16mm/5/8"	SB380A-501W




Stock Code	Description	Bore Size	Model
L B6004	Conical	20mm/25/32"	SB610A, SB610W
B6005	Cylindrical	23mm/29/32"	SB610A, SB610W


Roll Marking

All Parweld consumables are roll marked to enable you to identify genuine Parweld product.


BZL Contact Tips

A


Stock Code	Description	Wire Size	Material	Model
A B1427-06	Contact Tip	0.6mm/.023"	ECu	SB120A
B1427-08	Contact Tip	0.8mm/.030"	ECu	SB120A
B1427-10	Contact Tip	1.0mm/.040"	ECu	SB120A

B

Stock Code	Description	Wire Size	Material	Model
B B1527-06	Contact Tip	0.6mm/.023"	ECu	SB140A, SB150A
ECO1527-06	Everyday Tip	0.6mm/.023"	ECu	SB140A, SB150A
B1527-08	Contact Tip	0.8mm/.030"	ECu	SB140A, SB150A
ECO1527-08	Everyday Tip	0.8mm/.030"	ECu	SB140A, SB150A
B1527-09	Contact Tip	0.9mm/.035"	ECu	SB140A, SB150A
B1527-10	Contact Tip	1.0mm/.040"	ECu	SB140A, SB150A
B1527-12	Contact Tip	1.2mm/.045"	ECu	SB140A, SB150A

C


Stock Code	Description	Wire Size	Material	Model
C B2504-06	Contact Tip	0.6mm/.023"	ECu	SB230A-350W
B2504-08	Contact Tip	0.8mm/.030"	ECu	SB230A-350W
ECO2504-08	Everyday Tip	0.8mm/.030"	ECu	SB230A-350W
B2504-09	Contact Tip	0.9mm/.035"	ECu	SB230A-350W
B2504-10	Contact Tip	1.0mm/.040"	ECu	SB230A-350W
ECO2504-10	Everyday Tip	1.0mm/.040"	ECu	SB230A-350W
B2504-12	Contact Tip	1.2mm/.045"	ECu	SB230A-350W
ECO2504-12	Everyday Tip	1.2mm/.045"	ECu	SB230A-350W
B2504-14	Contact Tip	1.4mm/.055"	ECu	SB230A-350W
B2504-16	Contact Tip	1.6mm/1/16"	ECu	SB230A-350W
B2504-08CR	Contact Tip CR	0.8mm/.030"	ECu	SB230A-350W
B2504-10CR	Contact Tip CR	1.0mm/.040"	ECu	SB230A-350W
B2504-12CR	Contact Tip CR	1.2mm/.045"	ECu	SB230A-350W
B2504-10A	Contact Tip Al	1.0mm/.040"	ECu	SB230A-350W
B2504-12A	Contact Tip Al	1.2mm/.045"	ECu	SB230A-350W
B2504-16A	Contact Tip Al	1.6mm/1/16"	ECu	SB230A-350W

D


Stock Code	Description	Wire Size	Material	Model
D B2505-08	Contact Tip	0.8mm/.030"	CuCrZr	SB230A-350W
ECO2505-08	Everyday Tip	0.8mm/.030"	CuCrZr	SB230A-350W
B2505-09	Contact Tip	0.9mm/.035"	CuCrZr	SB230A-350W
B2505-10	Contact Tip	1.0mm/.040"	CuCrZr	SB230A-350W
ECO2505-10	Everyday Tip	1.0mm/.040"	CuCrZr	SB250A
B2505-12	Contact Tip	1.2mm/.045"	CuCrZr	SB230A-350W
ECO2505-12	Everyday Tip	1.2mm/.045"	CuCrZr	SB250A
B2505-16	Contact Tip	1.6mm/1/16"	CuCrZr	SB230A-350W

Roll Marking


All Parweld consumables are roll marked to enable you to identify genuine Parweld product.



Stock Code	Description	Wire Size	Material	Model
E B4014-08	Contact Tip	0.8mm/.030"	ECu	SB360A-SB501W
B4014-09	Contact Tip	0.9mm/.035"	ECu	SB360A-SB501W
B4014-10	Contact Tip	1.0mm/.040"	ECu	SB360A-SB501W
ECO4014-10	Everyday Tip	1.0mm/.040"	ECu	SB360A-SB501W
B4014-12	Contact Tip	1.2mm/.045"	ECu	SB360A-SB501W
ECO4014-12	Everyday Tip	1.2mm/.045"	ECu	SB360A-SB501W
B4014-14	Contact Tip	1.4mm/.055"	ECu	SB360A-SB501W
B4014-16	Contact Tip	1.6mm/1/16"	ECu	SB360A-SB501W
ECO4014-16	Everyday Tip	1.6mm/1/16"	ECu	SB360A-SB501W
B4014-20	Contact Tip	2.0mm/5/64"	ECu	SB360A-SB501W
B4014-24	Contact Tip	2.4mm/3/32"	ECu	SB360A-SB501W
B4014-10CR	Contact Tip CR	1.0mm/.040"	ECu	SB360A-SB501W
B4014-12CR	Contact Tip CR	1.2mm/.045"	ECu	SB360A-SB501W
B4014-10A	Contact Tip Al	1.0mm/.040"	ECu	SB360A-SB501W
B4014-12A	Contact Tip Al	1.2mm/.045"	ECu	SB360A-SB501W
B4014-16A	Contact Tip Al	1.6mm/1/16"	ECu	SB360A-SB501W




Stock Code	Description	Wire Size	Material	Model
F B4015-08	Contact Tip	0.8mm/.030"	CuCrZr	SB360A-SB501W
B4015-10	Contact Tip	1.0mm/.040"	CuCrZr	SB360A-SB501W
B4015-12	Contact Tip	1.2mm/.045"	CuCrZr	SB360A-SB501W
B4015-14	Contact Tip	1.4mm/.055"	CuCrZr	SB360A-SB501W
B4015-16	Contact Tip	1.6mm/1/16"	CuCrZr	SB360A-SB501W
B4015-24	Contact Tip	2.4mm/3/32"	CuCrZr	SB360A-SB501W




Stock Code	Description	Wire Size	Material	Model
G B6015-14	Contact Tip	1.4mm/.055"	CuCrZr	SB610A, SB610W
B6015-16	Contact Tip	1.6mm/1/16"	CuCrZr	SB610A, SB610W
B6015-20	Contact Tip	2.0mm/5/64"	CuCrZr	SB610A, SB610W
B6015-24	Contact Tip	2.4mm/3/32"	CuCrZr	SB610A, SB610W
B6015-28	Contact Tip	2.8mm/7/64"	CuCrZr	SB610A, SB610W
B6015-32	Contact Tip	3.2mm/1/8"	CuCrZr	SB610A, SB610W


BZL Tip Adaptors



Stock Code	Description	Tip Thread	Neck Thread	Length	Model
A B1507 L/H	Tip Adaptor	M6	M8x1 L/H	42mm/1.65"	SB150A
B1507	Tip Adaptor	M6	M8x1	34mm/1.34"	SB140A




Stock Code	Description	Tip Thread	Neck Thread	Model
B B2412	Tip Adaptor	M6	M6	SB230A, SB240A/W




Stock Code	Description	Tip Thread	Neck Thread	Model
C B2506	Tip Adaptor	M6	M8	SB250A, SB350W
ECO2506	Everyday Adaptor	M6	M8	SB250A, SB350W

Roll Marking


All Parweld consumables are roll marked to enable you to identify genuine Parweld product.




Stock Code	Description	Tip Thread	Neck Thread	Model
D B2536	Tip Adaptor	M8	M8	SB250A, SB350W




Stock Code	Description	Tip Thread	Neck Thread	Model
E B2612	Tip Adaptor	M6	M8	SB260A
B2612M8	Tip Adaptor	M8	M8	SB260A




Stock Code	Description	Tip Thread	Neck Thread	Length	Model
F B3612	Tip Adaptor	M6	M8	28.5mm/1.12"	SB360A
ECO3612	Everyday Adaptor	M6	M8	28.5mm/1.12"	SB360A
B3613	Tip Adaptor	M6	M8	31.5mm/1.24"	SB360A
B3614	Tip Adaptor	M8	M8	28.5mm/1.12"	SB360A
ECO3614	Everyday Adaptor	M8	M8	28.5mm/1.12"	SB360A




Stock Code	Description	Tip Thread	Neck Thread	Model
G B3812	Tip Adaptor	M8	M10 x 1	SB380A



Stock Code	Description	Tip Thread	Neck Thread	Model
H B4005	Tip Adaptor	M8	M8	SB400A



Stock Code	Description	Tip Thread	Neck Thread	Model
I B5001	Tip Adaptor	M8	M10 x 1	SB401W, SB501W
ECO5001	Everyday Adaptor	M8	M10 x 1	SB401W, SB501W




Stock Code	Description	Tip Thread	Neck Thread	Model
J B6003	Tip Adaptor	M8	M10 x 1	SB610A, SB610W
B6003M10	Tip Adaptor	M10	M10 x 1	SB610A, SB610W


Roll Marking

All Parweld consumables are roll marked to enable you to identify genuine Parweld product.


BZL Gas Diffusers




Stock Code	Description	Colour	Model
A B2405B	Gas Diffuser	Black	SB240A, SB240W
B2405C	Gas Diffuser	Ceramic	SB240A, SB240W
B2405W	Gas Diffuser	White	SB240A, SB240W




Stock Code	Description	Colour	Model
B B2605B	Gas Diffuser	Black	SB260A
B2605C	Gas Diffuser	Ceramic	SB260A
B2605W	Gas Diffuser	White	SB260A




Stock Code	Description	Colour	Model
C B3605B	Gas Diffuser	Black	SB360A
B3605C	Gas Diffuser	Ceramic	SB360A
B3605W	Gas Diffuser	White	SB360A



Stock Code	Description	Colour	Model
D B4003B	Gas Diffuser	Black	SB400A
B4003C	Gas Diffuser	Ceramic	SB400A



Stock Code	Description	Colour	Model
E B5005B	Gas Diffuser	Black	SB380A, SB401W, SB501W
B5005C	Gas Diffuser	Ceramic	SB380A, SB401W, SB501W
B5005W	Gas Diffuser	White	SB380A, SB401W, SB501W




Stock Code	Description	Colour	Model
F B6002C	Gas Diffuser	Ceramic	SB610A, SB610W


Roll Marking

All Parweld consumables are roll marked to enable you to identify genuine Parweld product.


ABI Nozzles



Stock Code	Description	Bore Size	Model
A 145.D021	Copper Nozzle	18mm/5/7"	A T 305 LW/A T 355 LW/A T 405 LW




Stock Code	Description	Bore Size	Model
B 145.D022	Copper Nozzle	16mm/5/8"	A T 305 LW/A T 355 LW/A T 405 LW




Stock Code	Description	Bore Size	Model
C 145.D024	Copper Nozzle	19mm/3/4"	A T 305 LW/A T 355 LW/A T 405 LW

ABI Tip Adaptors



Stock Code	Description	Tip Series	Model
A 145.D745	Tip Adaptor	M8	A T 305 LW/A T 355 LW/A T 405 LW

ABI Adaptors Piece



Stock Code	Description	Model
A 145.D080	Adaptor Piece	A T 405 LW

BZL Liner Selector Chart

	Stock Code	Description	Length	Wire Size	Model	SB120A	SB140A	SB150A	SB230A	SB240A	SB250A	SB260A	SB360A	SB380A	SB400A	SB610A	SB240W	SB350W	SB401W	SB501W	SB610W
A	B1435-30	Steel Liner	3m	.023"-.030"/0.6mm-0.8mm		■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B1435-40	Steel Liner	4m	.023"-.030"/0.6mm-0.8mm		■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B1435-20TEL	Steel Liner (Telwin)	2m	.023"-.030"/0.6mm-0.8mm		■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B1435-30TEL	Steel Liner (Telwin)	3m	.023"-.030"/0.6mm-0.8mm		■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B1436-30	Nylon Liner	3m	.023"-.035"/0.6mm-0.9mm		■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B1436-40	Nylon Liner	4m	.023"-.035"/0.6mm-0.9mm		■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
B	ECO / B1535-30	Steel Liner	3m	.023"-.035"/0.6mm-0.9mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	ECO / B1535-40	Steel Liner	4m	.023"-.035"/0.6mm-0.9mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B1535-50	Steel Liner	5m	.023"-.035"/0.6mm-0.9mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B1535-20TEL	Steel Liner (Telwin)	2m	.023"-.035"/0.6mm-0.9mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
C	B1535-30TEL	Steel Liner (Telwin)	3m	.023"-.035"/0.6mm-0.9mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B1536-30++	Teflon Liner	3m	.023"-.035"/0.6mm-0.9mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B1536-40++	Teflon Liner	4m	.023"-.035"/0.6mm-0.9mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B1536-50++	Teflon Liner	5m	.023"-.035"/0.6mm-0.9mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
B	ECO / B2524-30	Steel Liner	3m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	ECO / B2524-40	Steel Liner	4m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B2524-50	Steel Liner	5m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B2513-30++	Teflon Liner	3m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
C	B2513-40++	Teflon Liner	4m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B2513-50++	Teflon Liner	5m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
B	B3631-30	Steel Liner	3m	1/16"/1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B3631-40	Steel Liner	4m	1/16"/1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B3631-50	Steel Liner	5m	1/16"/1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B3626-30++	Teflon Liner	3m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
C	B3626-40++	Teflon Liner	4m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B3626-50++	Teflon Liner	5m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
B	B4631-30	Steel Liner	3m	5/64"-3/32"/2.0mm-2.4mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B4631-40	Steel Liner	4m	5/64"-3/32"/2.0mm-2.4mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B4631-50	Steel Liner	5m	5/64"-3/32"/2.0mm-2.4mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B6033-30	Plain Liner (Rz-2)	3m	1/16"-5/64"/1.6mm-2.0mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
D	B6033-40	Plain Liner (Rz-2)	4m	1/16"-5/64"/1.6mm-2.0mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B6033-50	Plain Liner (Rz-2)	5m	1/16"-5/64"/1.6mm-2.0mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B6034-30	Plain Liner (Rz-2)	3m	3/32"/2.4mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B6034-40	Plain Liner (Rz-2)	4m	3/32"/2.4mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
D	B6035-30	Plain Liner (Rz-2)	3m	.110"-1/8"/2.8mm-3.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B6035-40	Plain Liner (Rz-2)	4m	.110"-1/8"/2.8mm-3.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
B	B5033-30	Plain Liner	3m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B5033-40	Plain Liner	4m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B5033-50	Plain Liner	5m	.040"-.045"/1.0mm-1.2mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B5034-30	Plain Liner	3m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
B	B5034-40	Plain Liner	4m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B5034-50	Plain Liner	5m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
A	B4033-30	Plain Liner	3m	5/64"-3/32"/2.0mm-2.4mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B4033-40	Plain Liner	4m	5/64"-3/32"/2.0mm-2.4mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B4033-50	Plain Liner	5m	5/64"-3/32"/2.0mm-2.4mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B1564-30++	Polyamide Liner	3m	.030"-.045"/0.8mm-1.2mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
C	B1564-40++	Polyamide Liner	4m	.030"-.045"/0.8mm-1.2mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B1564-50++	Polyamide Liner	5m	.030"-.045"/0.8mm-1.2mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B2564-30++	Polyamide Liner	3m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
C	B2564-40++	Polyamide Liner	4m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B2564-50++	Polyamide Liner	5m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
C	B3564-30++	Polyamide Liner	3m	1/16"-5/64"/1.6mm-2.0mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B3564-40++	Polyamide Liner	4m	1/16"-5/64"/1.6mm-2.0mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B3564-50++	Polyamide Liner	5m	1/16"-5/64"/1.6mm-2.0mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B2554-30++	Carbon Teflon Liner	3m	.040"-.045"/1.0mm-1.2mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
C	B2554-40++	Carbon Teflon Liner	4m	.040"-.045"/1.0mm-1.2mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B2554-50++	Carbon Teflon Liner	5m	.040"-.045"/1.0mm-1.2mm		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	B3554-30++	Carbon Teflon Liner	3m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	B3554-40++	Carbon Teflon Liner	4m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
C	B3554-50++	Carbon Teflon Liner	5m	.045"-.1/16"/1.2mm-1.6mm		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□

■ Solid Box = Recommended Liner
□ Clear Box = Compatible Liner

++ For optional Neck Liners please use the following codes.

B9000 for soft wires .030"-.045"/0.8mm-1.0mm, B9001 for .040"-.1/16"/1.0mm-1.6mm

Colour Code

0.6-0.9mm Wire ■ Blue 1.2-1.6mm Wire ■ Yellow
1.0-1.2mm Wire ■ Red 2.0-2.4mm Wire ■ Green

