



BND

The Parweld BND torch gives industrial grade durability and performance.

The classic BND design is popular throughout the world with professional welders.

Parweld now also offer the BND with our ergonomic Pro-Grip Max[®] handle system with the comfort and manoeuvrability of our modern handle design.

**NOW AVAILABLE WITH PRO-GRIP MAX[®]
HANDLE SYSTEM**



KEY FEATURES

Choose between the classic BND design or the modern ergonomic Pro-Grip MAX[®] handle system.

The Pro-Grip MAX[®] BND offers the classic BND performance combined with the superior comfort and manoeuvrability of our Pro-Grip MAX[®] handle.



HANGER HOOKS

Encourages an efficient and tidy workspace.

CLASSIC HANDLE

External ribs provide an improved grip. Designed for balance, lightness and strength.

SWAN NECKS

High temperature resistant insulation materials reduce the risk of shorting.

Metal outer jacket
Swivel neck.

CONTACT TIPS

Manufactured using a harder and higher conductivity copper alloy than the OEM. Elliptical locking system.

NOZZLES

Brass nozzles reduce spatter build up.

PRO-GRIP MAX[®] HANDLE SYSTEM

Ergonomically superior.

Integrated soft grips ensure the handle remains in place with minimal grip pressure.

Screwless design for rapid servicing.

KNUCKLE JOINT

Small movements of handle and neck are possible independently of cable assembly.

CABLE SUPPORTS

Freedom of movement and progressive support to the power cable.

HYPERFLEX[™] CABLE SYSTEMS

Air cooled cable assemblies offer flexibility and the highest heat and abrasion resistance of any known cable.

GUN PLUG BODIES

Spring loaded pins for improved contact.



BND TORCH RANGE

ALTERNATIVE ENDS AVAILABLE

See pages 164 - 165 for more information.



		PEZ 200E	PEZ 300E	PEZ 400E
STOCK CODE	10FT	4E210AE	4E310AE	4E410AE
	12FT	4E212AE	4E312AE	4E412AE
	15FT	4E215AE	4E315AE	4E415AE
COOLING		Air	Air	Air
RATING		200A CO ₂ 150A Mixed Gas @ 60%	300A CO ₂ 200A Mixed Gas @ 60%	400A CO ₂ 320A Mixed Gas @ 60%
WIRE SIZE		0.8mm-1.2mm (.030"-0.045")	0.8mm-1.2mm (.030"-0.045")	0.8mm-2.0mm (.030"-5/64")

PRO-GRIP MAX[®] BND TORCH RANGE




		PRO GRIP MAX [®] PEZ 200E	PRO GRIP MAX [®] PEZ 300E	PRO GRIP MAX [®] PEZ 400E
STOCK CODE	10FT	PRO4E210AE	PRO4E310AE	PRO4E410AE
	12FT	PRO4E212AE	PRO4E312AE	PRO4E412AE
	15FT	PRO4E215AE	PRO4E315AE	PRO4E415AE
COOLING		Air	Air	Air
RATING		180A CO ₂ 150A Mixed Gas @ 60%	230A CO ₂ 200A Mixed Gas @ 60%	320A CO ₂ 270A Mixed Gas @ 60%
WIRE SIZE		0.8mm-1.2mm (.030"-0.045")	0.8mm-1.2mm (.030"-0.045")	0.8mm-2.0mm (.030"-5/64")



PEZ 200E

AIR COOLED MIG TORCH

200A CO₂ 150A Mixed Gas @ 60% Duty Cycle, EN60974-7, 0.8mm-1.2mm (.030"-0.045") Wires

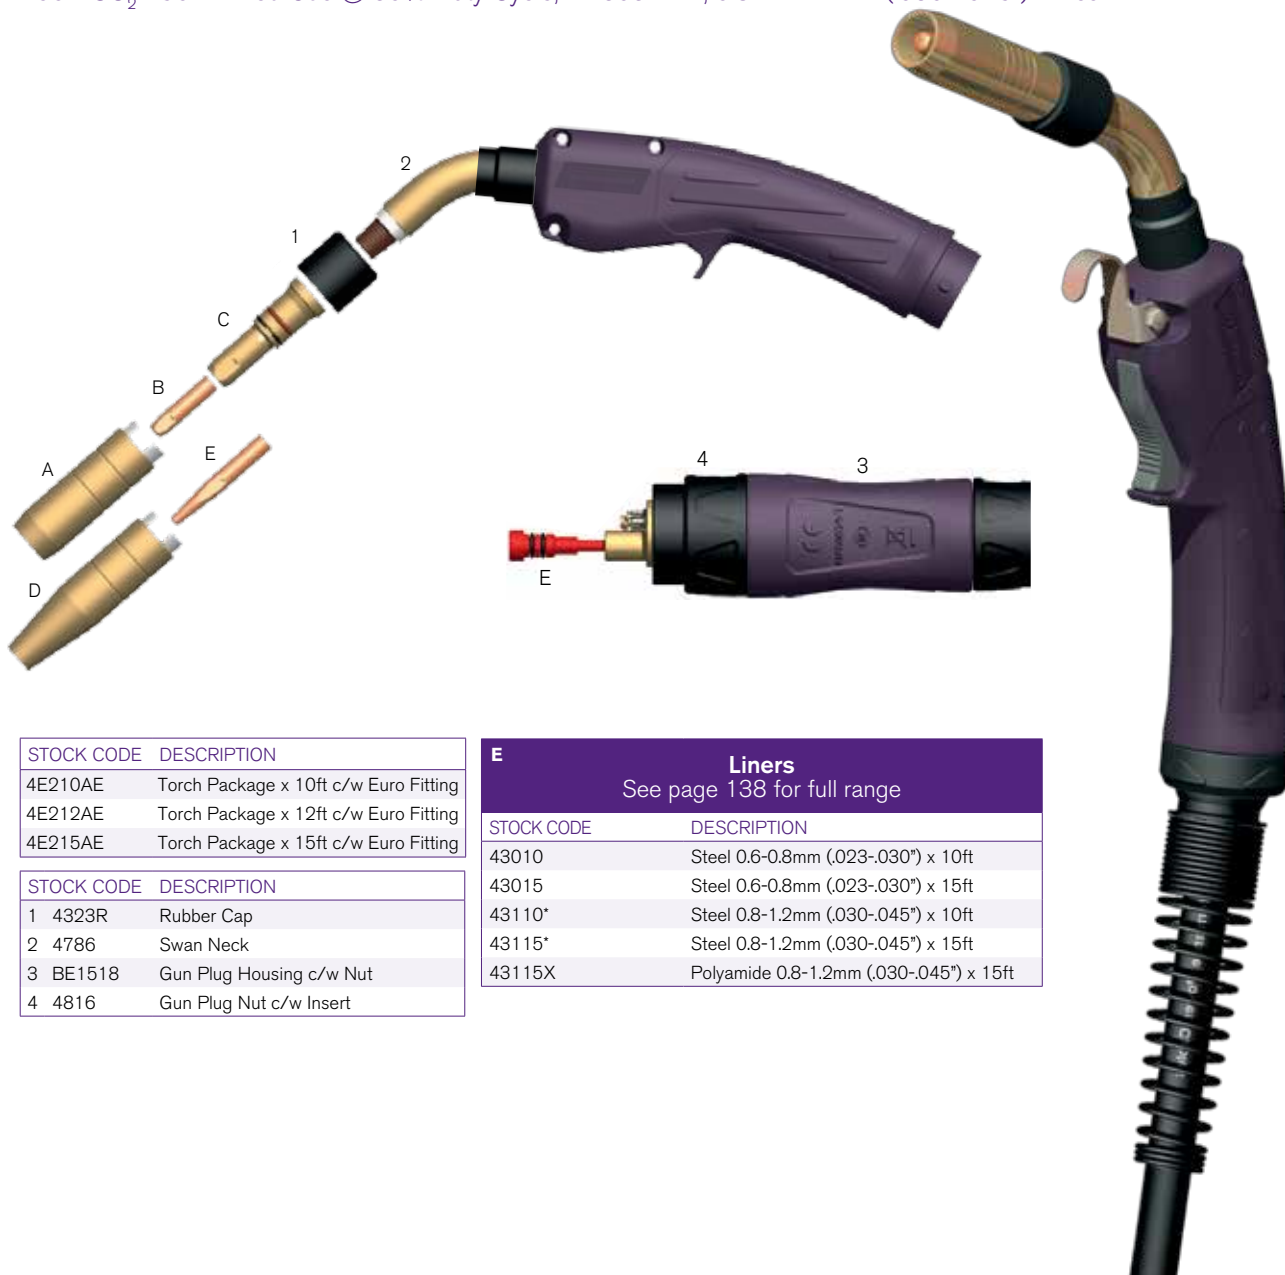

STOCK CODE	DESCRIPTION
4E210AE	Torch Package x 10ft c/w Euro Fitting
4E212AE	Torch Package x 12ft c/w Euro Fitting
4E215AE	Torch Package x 15ft c/w Euro Fitting

STOCK CODE	DESCRIPTION
1 4323R	Rubber Cap
2 4786	Swan Neck
3 BE1518	Gun Plug Housing c/w Nut
4 4816	Gun Plug Nut c/w Insert

E Liners See page 138 for full range	
STOCK CODE	DESCRIPTION
43010	Steel 0.6-0.8mm (.023-.030") x 10ft
43015	Steel 0.6-0.8mm (.023-.030") x 15ft
43110*	Steel 0.8-1.2mm (.030-.045") x 10ft
43115*	Steel 0.8-1.2mm (.030-.045") x 15ft
43115X	Polyamide 0.8-1.2mm (.030-.045") x 15ft

A

Nozzles

STOCK CODE	MATERIAL	BORE
4391*	Brass	16mm (5/8")
4393	Copper	16mm (5/8")
4392	Brass	13mm (1/2")
4394	Copper	13mm (1/2")

B

Contact Tips

STOCK CODE	WIRE SIZE	MATERIAL
7488	0.8mm (.030")	ECu
7489	0.9mm (.035")	ECu
7496	1.0mm (.040")	ECu
7490*	1.2mm (.045")	ECu

C

Head Assembly

STOCK CODE
4335*

D

Nozzles

STOCK CODE	MATERIAL	BORE
4295	Brass	10mm (3/8")

E

Contact Tips Pipeline

STOCK CODE	WIRE SIZE	MATERIAL
4281	0.9mm (.035")	ECu Pipeline
4282	1.2mm (.045")	ECu Pipeline

C

Head Assembly

STOCK CODE
4335*

* Denotes standard build

ROLL MARKING


All Parweld consumables are roll marked to enable you to identify genuine Parweld product.



PEZ 300E

AIR COOLED MIG TORCH

300A CO₂, 200A Mixed Gas @ 60% Duty Cycle, EN60974-7, 0.8mm-1.2mm (.030"-0.045") Wires

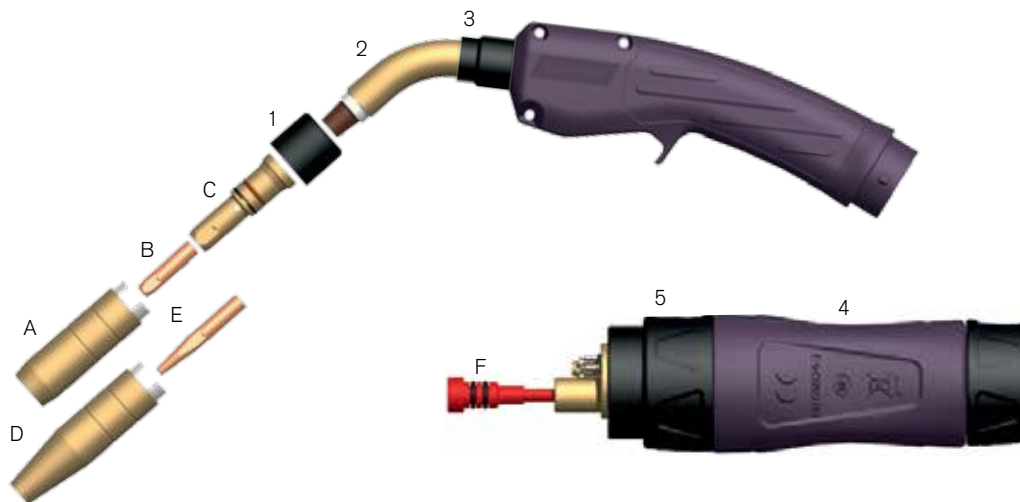

STOCK CODE	DESCRIPTION
4E210AE	Torch Package x 10ft c/w Euro Fitting
4E212AE	Torch Package x 12ft c/w Euro Fitting
4E215AE	Torch Package x 15ft c/w Euro Fitting

STOCK CODE	DESCRIPTION
1 4323R	Rubber Cap
2 4786	Swan Neck
3 4780	Neck Insulator
4 BE1518	Gun Plug Housing c/w Nut
5 4816	Gun Plug Nut c/w Insert

F Liners See page 138 for full range	
STOCK CODE	DESCRIPTION
43110*	Steel 0.8-1.2mm (.030-.045") x 10ft
43115*	Steel 0.8-1.2mm (.030-.045") x 15ft
43115X	Polyamide 0.8-1.2mm (.030-.045") x 15ft

